

NewNight® BLADE1000

Street-, Park-, Residential- and District Lighting

This high-quality bollard from the NewNight® series BLADE is suitable as an orienting and conductive lighting in residential and administrative complexes, in parks and gardens, on paths, external staircases as well as access roads and garage entrances.

Light control: BLADE-LENSING SYSTEM LED LIGHT 8in1

Light output: 360° rotationally symmetrical light distribution (alternatively 180° asymmetrical)

We supply these bollard for the different dimensions of the installation locations and

different heights above floor: 800mm | 1000mm

The bollard can be supplied with a ground anchor plate or with an integrated foundation pipe.

Technical Data

System power.....12 watts | 14 watts

LED lifetime.....> 60.000 hrs.

LED color temperature.....4100 K*

Luminous flux 1040lm (12W) | 1488lm (14W)

Color rendering index.....CRI > 85

LED spaceIP 67

LED control gear.....IP 66 | ENEC

Operating voltage90-260VAC, 50/60Hz

Protection class.....1 (SKI)


Operating range.....– 40°C to 55°C

height above ground level.....1000mm up to 5000mm

Connection compartment with door lock: triangular

The bollard is wired ready for connection

*Color temperature freely selectable

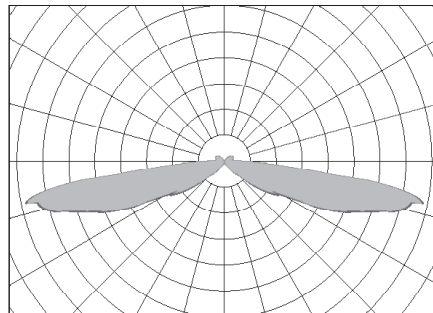

Due to the complexity of the many possible combinations of drivers and LED modules, the values shown for technical LED parameters, including performance parameters, are typical. Actual values of specific products in specific configurations may vary from these typical values. The information and diagrams contained in this document do not constitute an offer or contractual obligation. Product parameters may change as a result of technical innovation and will be undertaken without prior notice. Our manufacturing conforms to DIN-, EN-, and VDE-, CE regulations.